

NVQ200-22  
NQS250-22



NVM-TCH 604015

NVQ370  
NVQ380-22  
NQS350B-22  
MFQ370-22



NVM-2BH 604016

NVQ470-22  
MFQ470-22




NVM-3AH 604018

NVQ470-22  
MFQ470-22



# NuCable

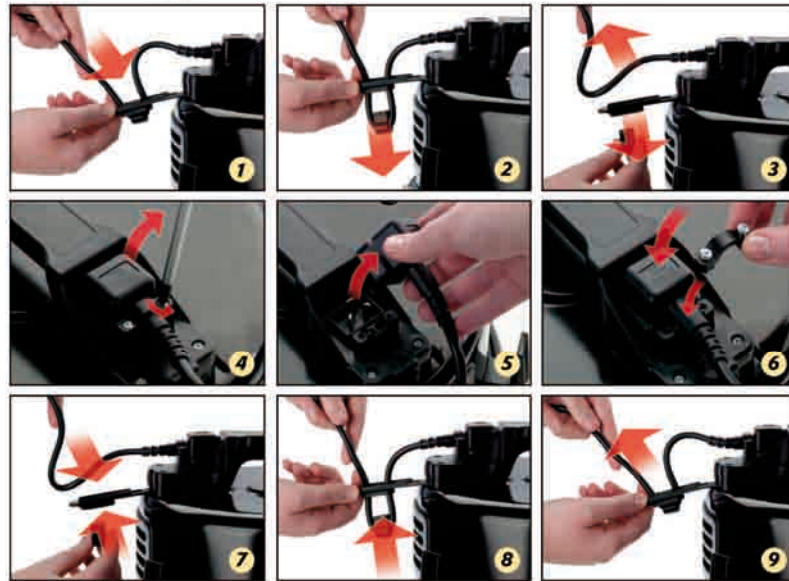

	Motor	Airflow	Suction	Capacity	Cleaning range
NVQ200-22	1200W	45 litres/sec.	2600mm	9 litres	23.2m
NVQ370-22	1200W	45 litres/sec.	2600mm	15 litres	23.2m
NVQ380-22	1200W	45 litres/sec.	2600mm	15 litres	23.2m
NVQ470-22	1200W	45 litres/sec.	2600mm	27 litres	23.2m
NQS250B-22	1200W	45 litres/sec.	2600mm	9 litres	23.2m
NQS350B-22	1200W	45 litres/sec.	2600mm	14 litres	23.2m
MFQ370-22	1200W	45 litres/sec.	2600mm	12 litres	23.2m
MFQ470-22	1200W	45 litres/sec.	2600mm	27 litres	23.2m



	Weight	Size	Sound Pressure
NVQ200-22	7.8Kgs	355x355x435mm	65-70 dB (A) (IEC 60704-2-1) Uncertainty: 0.2 dB (A)
NVQ370-22	8.1Kgs	355x355x485mm	
NVQ380-22	9.5Kgs	355x355x485mm	
NVQ470-22	9.7Kgs	358x450x665mm	
NQS250B-22	8.3Kgs	340x340x395mm	
NQS350B-22	11.7Kgs	395x350x560mm	
MFQ370-22	8.9Kgs	355x355x485mm	
MFQ470-22	9.7Kgs	358x450x665mm	

Distributed by:

# NVQ/MFQ/NQS



Numatic International Limited, Chard, Somerset, TA20 2GB, England. Telephone: 01460 68600 Fax: 01460 68458 [www.numatic.co.uk](http://www.numatic.co.uk)  
GERMANY: [www.numatic.de](http://www.numatic.de) SWITZERLAND: [www.numatic.ch](http://www.numatic.ch) FRANCE: [www.numatic.fr](http://www.numatic.fr) NETHERLANDS: [www.numatic.nl](http://www.numatic.nl) SOUTH AFRICA: [www.numatic.co.za](http://www.numatic.co.za)

80% recycled paper Specification subject to change without prior notice. [www.numatic.com](http://www.numatic.com) © Numatic International Limited 2010 231807/0410B

